

OPT-1102 Series Fast Ethernet Media Converter

2*10/100Base-Tx to 100Base-Fx

RoHS Compliant



>>Description

The OPT-1102 series is among Optone's answers to expanding existing Fast Ethernet networks. The easy implementation and expansion of 100Base-TX/FX networks can be further assured with this converter.

The converter is completely transparent when connected so the network performs exactly the way it did before only now, it allows the co-existence of both copper and fiber mediums. Added flexibility is available with ST, SC, FC and WDM Simplex SC connectors. Extra distances are possible with the single mode version delivering up to 120km connectivity per transmitted segment.

The OPT-1102 allows the installation of fiber cabling anywhere within a Fast Ethernet network topology by directly connecting to existing devices. Its compact modular design facilitates deployment in a narrow desktop location to save space.

>>Main Features

- Complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3x auto-negotiation
- Optional 19" System Chassis (OPT-R14) holds up to 14 Media Converters
- Extends distances ranging from 2km (multi-mode fiber) to 120km (single mode fiber)
- Auto-negotiation support on RJ-45 port
- Auto-negotiation of duplex(HDX/FDX) on RJ-45 port
- Auto MDI/MDI-X support on RJ-45 port
- External power supply
- Supports packet length up to 2k
- FCC Class A & CE approved

>> Specifications

Interface

- 2 x Ethernet port (RJ45) 10/100Base-Tx
- 1 x Optical port (1x9) 100Base-Fx

Optical Port

- Available for 1310nm and 1550nm Single mode, 1310nm Multi mode;
- Transfer Distance: up to 120km;
- Connectors: SC, ST, FC optional
- Fiber core: 9/125µm on single-mode fiber; 50/125µm and 62.5/125µm on multi-mode fiber

Ethernet Port

- Cable: Cat 5/5e/6 UTP cable
- Available speed: force 10Mbps, force 100Mbps and auto-detective 10/100Mbps Full-Duplex and Half-Duplex auto-negotiation
- Connectors: RJ-45 Connector; MDI/MDI-X connection auto-sensing

Standard

- IEEE802.3 (10Base-T)

- IEEE802.3u (100Base-TX/FX)
- IEEE802.3x (Flow control)

LED Indicators

- Power Status, FX Link/Act, TX Link/Act

Power Requirement

- Input: 5V DC

Physical Characteristics

- Housing: Metal enclosure
- Dimensions: 94 x 70 x 26mm (Excluding the connector)
- Weight: 0.25kg

Environmental Limits

- Operating Temperature: 0°C to 50°C
- Storage Temperature: -20°C to 70°C
- Operating Humidity: 10% to 90% RH
- Storage Humidity: 5% to 90% RH

Agency Approvals


- FCC Part 15 of Class A & CE approved

Warranty

- 3 years

>> Applications

The following illustrates typical applications for the OPT-1102 series. The actual distances will depend on several factors including the quality of cables used and the terminal equipment employed.

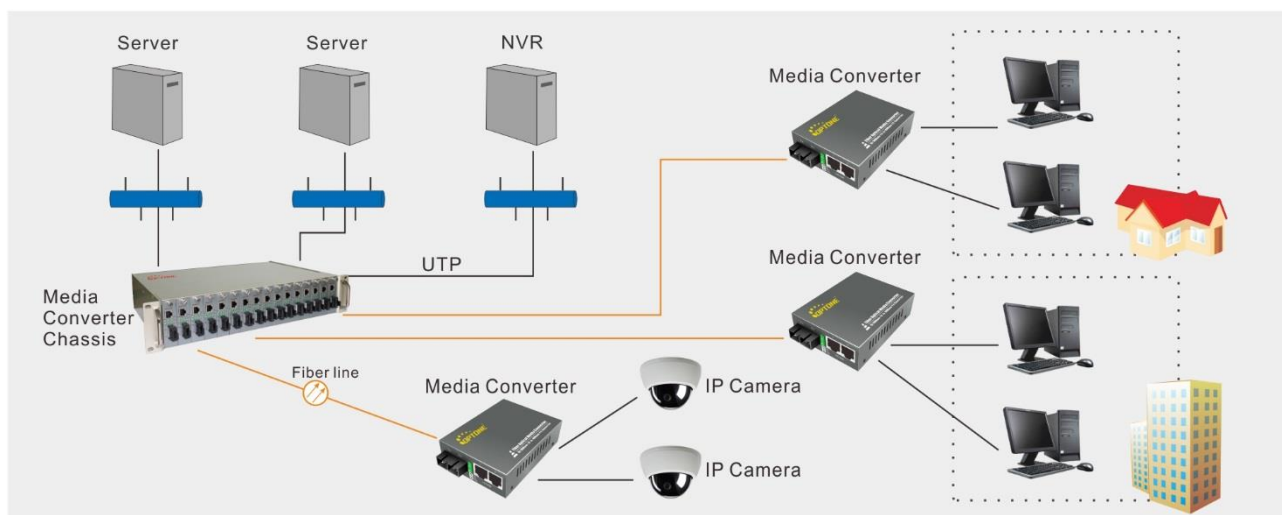



>>Ordering Information

Double Fiber Media Converter

OPT-1102	2*10/100Base-Tx to 100Base-Fx, Multi mode, 2Km, SC/ST/FC
OPT-1102S25	2*10/100Base-Tx to 100Base-Fx, Single mode, 25Km, SC/ST/FC
OPT-1102S40	2*10/100Base-Tx to 100Base-Fx, Single mode, 40Km, SC/ST/FC
OPT-1102S60	2*10/100Base-Tx to 100Base-Fx, Single mode, 60Km, SC
OPT-1102S80	2*10/100Base-Tx to 100Base-Fx, Single mode, 80Km, SC
OPT-1102S100	2*10/100Base-Tx to 100Base-Fx, Single mode, 100Km, SC
OPT-1102S120	2*10/100Base-Tx to 100Base-Fx, Single mode, 120Km, SC

WDM Fiber Media Converter

OPT-1102S25A/B	2*10/100Base-Tx to 100Base-Fx, Bi-Directional, 25Km, SC/ST/FC
OPT-1102S40A/B	2*10/100Base-Tx to 100Base-Fx, Bi-Directional, 40Km, SC/ST/FC
OPT-1102S60A/B	2*10/100Base-Tx to 100Base-Fx, Bi-Directional, 60Km, SC
OPT-1102S80A/B	2*10/100Base-Tx to 100Base-Fx, Bi-Directional, 80Km, SC

>>Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTONE before they become applicable to any particular order or contract. In accordance with the OPTONE policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTONE or others. Further details are available from any OPTONE sales representative.

sales@optone.net
<http://www.optone.net>