

OPT-IES1034 Series Industrial Ethernet Switch

4*10/100Base-Tx to 2*GE SFP
RoHS Compliant



>>Description

OPT-IES1034 series are equipped with 4 Fast Ethernet ports and up to 2 Gigabit fiber optic ports, making them ideal for applications that demand high bandwidth. OPT-IES1034 series are one of Optone new ultra low power consumption Green Ethernet solutions. Its full load power consumption is 5.7W which enables not only power electricity saving, but also a longer life span for the devices. OPT-IES1034 unmanaged switches are powered with 12~48VDC power supply, and its operation temperature ranges from -40 to 85°C (-40 to 185°F). They are specially designed for harsh industrial environments and their EMC performance reaches industrial level 4. OPT-IES1034 series can be installed easily on a DIN-Rail or panel mounting distribution boxes.

>>Main Features

- Green Ethernet solution with ultra low power consumption design
- Both standard and wide operating temperature
- Complies with IEEE 802.3, IEEE 802.3u, IEEE802.3z, IEEE802.3ab
- Extends distances ranging from 550m (multi-mode fiber) to 120km (single mode fiber)
- Supports auto MDI/MDIX function
- Supports DIN-Rail and hang wall mounting
- Status LED for easy monitoring of device status
- Maximum frame size of 1632 bytes
- Support 8k MAC address
- Support dual power supply backup
- IP40 protection class
- FCC Class A & CE approved



>> Specifications

Interface

- 4 x Ethernet port (RJ45) 10/100Base-Tx
- 2 x Optical port (SFP) 1000Base-Fx

Optical Port

- Available for 1310nm and 1550nm Single mode, and 850nm Multi mode
- Transfer Distance: up to 120km
- Connectors: SFP
- Fiber core: 8.3 μ m, 8.7 μ m, 9 μ m and 10 μ m on single-mode fiber; 50, 62.5 and 100 μ m on multi-mode fiber

Ethernet Port

- Standard: IEEE802.3, IEEE802.3u, IEEE 802.3x
- Available speed: force 10Mbps, force 100Mbps and auto-detective 10/100Mbps Full-Duplex and Half-Duplex auto-negotiation
- Connectors: RJ-45 Connector; MDI/MDI-X connection auto-sensing

Switch Properties

- MAC Table: 8K
- Packet Buffer: 1Mbit
- Switching Delay: <5 μ s

LED Indicators

- Power Status, Speed Status, SFP Link/Act, TX Link/Act

Power Requirement

- Input: 12VDC~48VDC
- Consumption: MAX 5.7W
- Reverse Connection Protection: Support
- Redundancy Protection: Support
- Dual Power: Support

Physical Characteristics

- Housing: Metal enclosure
- Protection Class: IP40
- Dimensions: 53 x 165 x 145mm
- Weight: 0.85kg
- Installation: DIN-Rail or Panel mounting

Environmental Limits

- Operating Temperature: -40°C to 85°C
- Storage Temperature: -40°C to 85°C
- Operating Humidity: 10% to 95% RH (non-condensing)
- Storage Humidity: 5% to 95% RH (non-condensing)

Agency Approvals

- FCC Part 15 of Class A & CE approved


Industrial Standard

- EMI: FCC/CE/LVD/EMC
- EMS:
 - IEC61000-4-2 (ESD): \pm 8kV (contact), \pm 15kV (air)
 - IEC61000-4-3 (RS): 10V/m (80MHz-2GHz)
 - IEC61000-4-4 (EFT): Power Port: \pm 4kV; Data Port: \pm 2kV
 - IEC61000-4-5 (Surge): Power Port: \pm 2kV/DM, \pm 4kV/CM; Data Port: \pm 2kV
 - IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz)
 - IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s)
- Shock: IEC 60068-2-27
- Free Fall: IEC 60068-2-32
- Vibration: IEC 60068-2-6

Warranty

- 5 years

>> Mechanical Drawing

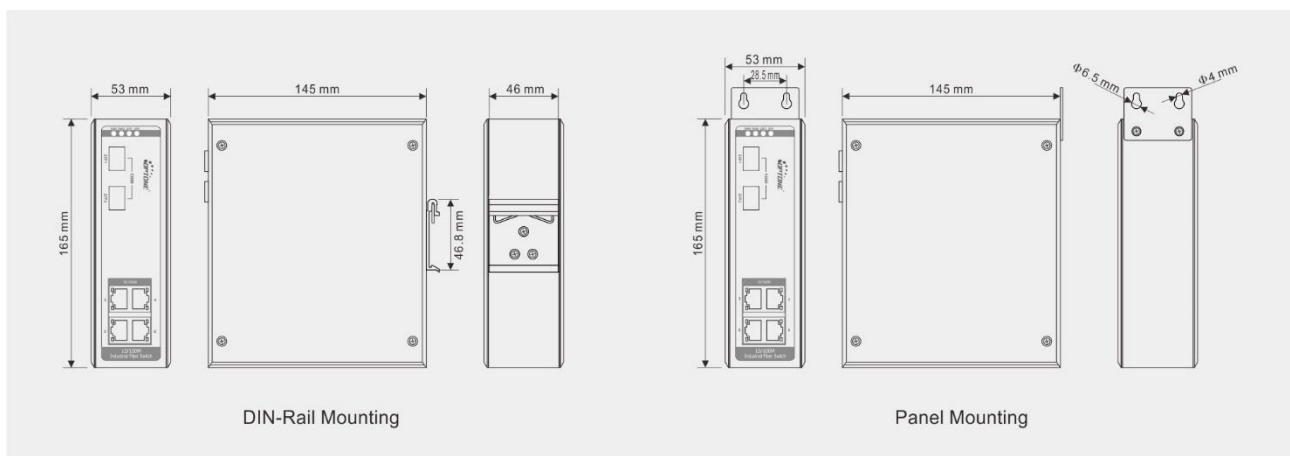



>>Ordering Information

OPT-IES1034 4*10/100Base-Tx to 2*GE SFP Fiber ports

Optional SFP

<i>Model</i>	<i>Rate</i>	<i>Wavelength</i>	<i>Distance</i>	<i>Connector</i>
SFP-SX-MM-0205I	1.25Gbps	850nm	0.5km	2xLC
SFP-LX-SM-0220I	1.25Gbps	1310nm	20km	2xLC
SFP-LX-SM-0240I	1.25Gbps	1310nm	40km	2xLC
SFP-ZX-SM-0280I	1.25Gbps	1550nm	80km	2xLC

>>Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTONE before they become applicable to any particular order or contract. In accordance with the OPTONE policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTONE or others. Further details are available from any OPTONE sales representative.

sales@optone.net
<http://www.optone.net>

Edition FEB 10, 2022
Published by Optone Technology Limited
Copyright © OPTONE
All Rights Reserved